

FEATURES


- Thermal printing in line.
- Function of self-test and Character with high-resolution.
- Serial interface, connected with the panel via only one cable.
- Fitted in metal case, installed on top of the panel cabinet and fixed with gland joint.




DESCRIPTION

VG-6547 is developed as an external printer, which integrated with VG-6847 Digital Fire Alarm Panel. It is capable to print out different categories of messages, such as Fire Alarm, Fault, Action, etc.

DIMENSION

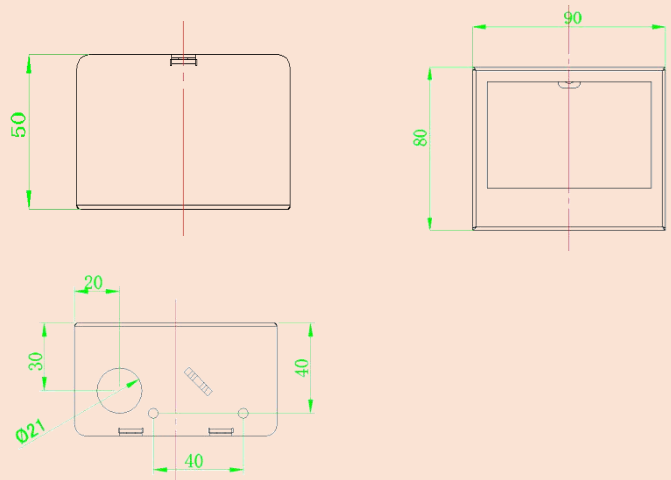

WIRING INSTRUCTION

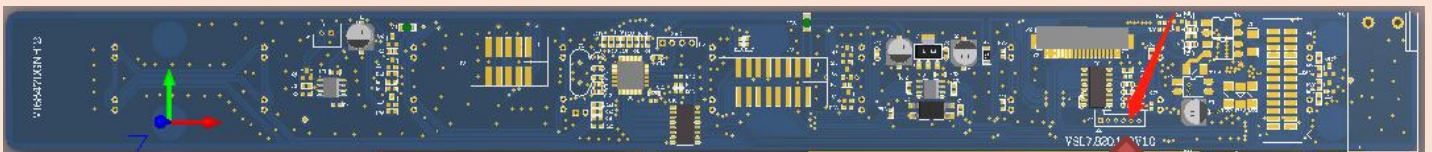

The 6P cable from the printer is connected to P7 of VG-6847 Indication Board

TECHNICAL DATA

Operating Voltage	DC5~8V	Interface	RS232 interface
Maximum current	3A	Printing method	Thermal printing in line
Temperature range	0°C ~ +50°C	Dimensions	90mm×80mm×50mm
Humidity	≤90%GH (40±2°C) without condensation	Printing paper	thermal sensitive paper, with the width of 57.5±0.5mm