

FEATURES


- * Utilizing emergency start and abort functions
- * Key switch available for MANUAL or AUTO mode
- * Metal housing of strong protection
- * Compatible with conventional gas extinguishing panel



DESCRIPTION

VG-6752 Start/Abort Button, with metal housing, is used in conventional gas extinguishing system to start or stop gas release. A key-switch is available to change between MANUAL and AUTO mode.

DIMENSION

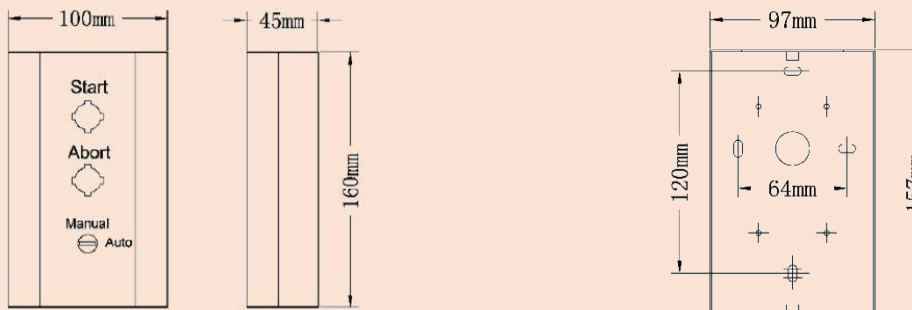

TECHNICAL DATA

Operating Voltage	DC24V-28V	Temperature	-10°C ~ 45°C
Standby Current	≤0.4mA	Humidity	≤95%RH (40±2°C)
Action Current	≤50mA	Installation	Wall-mount